


- maximum free fall height: 145 cm
- essential protective area (DIN EN 1176): 26 m²
- recommended ground surface:
40cm of 2/8mm pea gravel
for fall protection, coarse sand,
wood chips or HIC- tested synthetics.

)* Protective area according to EN 1176:

- 320x820cm when built in natural shock absorbing ground (usually loose fill)
- 320x720cm when built in solid shock absorbing ground (usually synthetic coating)
- no obstacles in swing direction

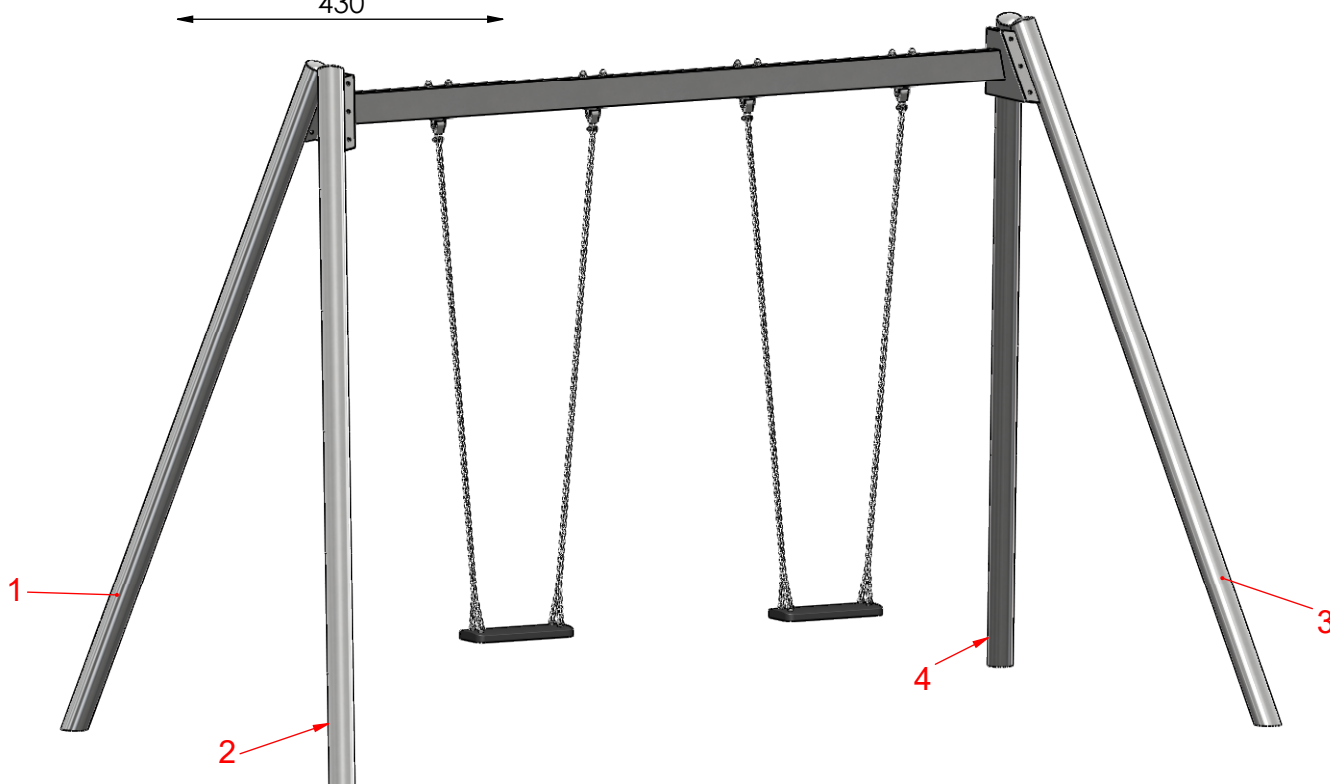

ASSEMBLY DRAWING


Bearbeiter: Steffen Miksch

Datum: 23.01.2017

Page: 1/2

Spiel-Bau GmbH
Alte Weinberge 21 - D-14776 Brandenburg / Havel
Tel.: 03381 / 26 14 0 - Fax.: 03381 / 26 14 18



Doppelschaukel Einpunktlagern
Order-No.: 6.5111-E-en

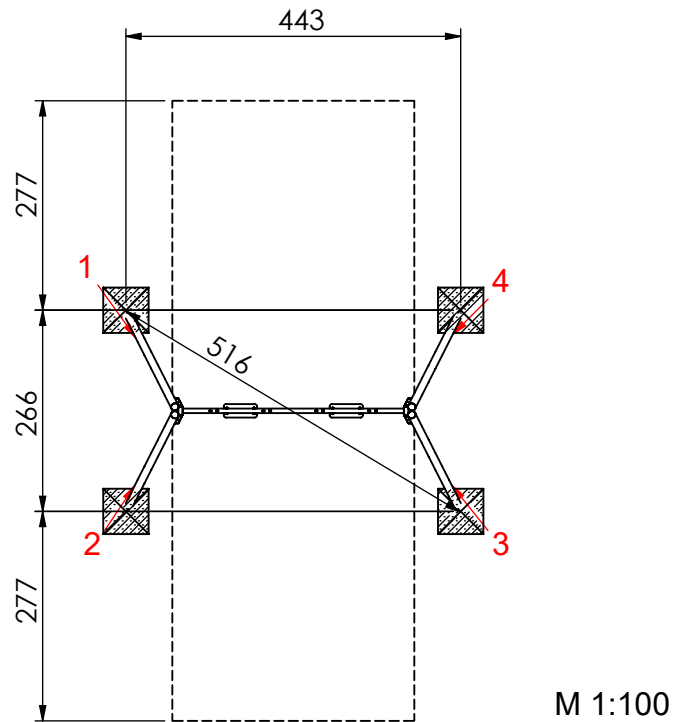

Foundation: In-situ concrete C25/30

- Posts 1 to 4:
each 60x60x40 cm look at detail a1-E)

Foundation detail - post a1-E) Scale 1:25

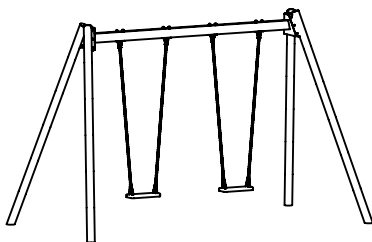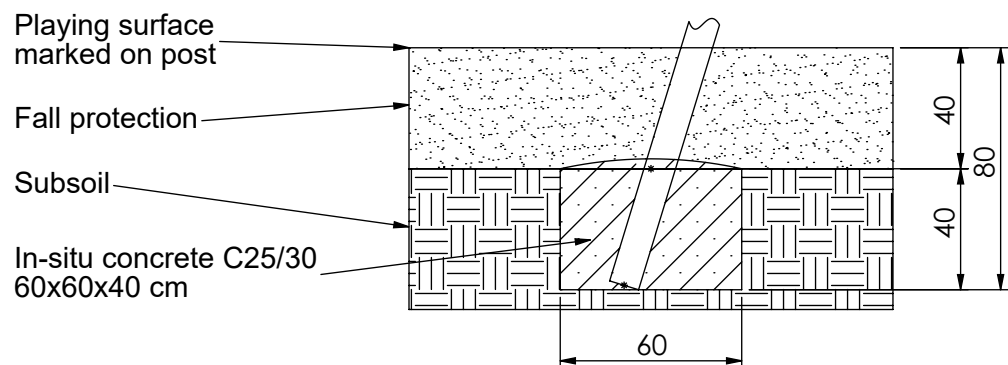

ASSEMBLY DRAWING

Bearbeiter: Steffen Miksch

Datum: 23.01.2017

Page: 2/2

Spiel-Bau GmbH
Alte Weinberge 21 - D-14776 Brandenburg / Havel
Tel.: 03381 / 26 14 0 - Fax.: 03381 / 26 14 18

Doppelschaukel Einpunktlagern
Order-No.: 6.5111-E-en